

B200017



► 主要技术特性 (Main Specifications)

- 适用导线规格 (Applicable wire) : AWG30#~24#
- 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- 温度范围 (Temperature range) : -25°C~+85°C
- 额定电压 (Voltage rating) : 250V AC, DC
- 额定电流 (Current rating) : 2A AC, DC
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstanding voltage) : 500V AC/minute

材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated



产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

TERMINAL


B200017-4

YST200-C1





HOUSING

B200017-2-R

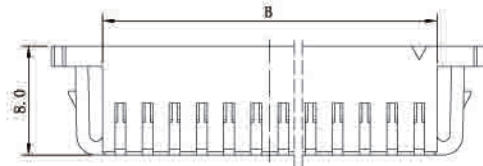

B200017-2-S

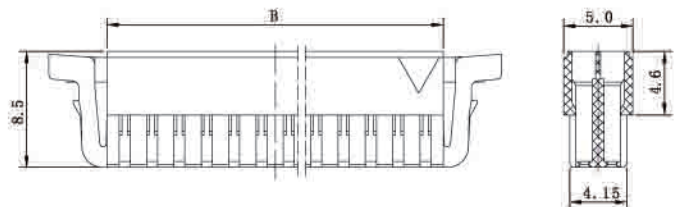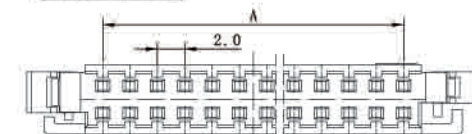

HOUSING

极数 Circuits	型号 Type		尺寸 (Dimensions) mm		备注型号 P. S. Type	
			A	B		
12	B200017-2-12R	B200017-2-12S	10.0	12.6	SMH200-H12R	SMH200-H12S
14	B200017-2-14R	B200017-2-14S	12.0	14.6	SMH200-H14R	SMH200-H14S
16	B200017-2-16R	B200017-2-16S	14.0	16.6	SMH200-H16R	SMH200-H16S
18	B200017-2-18R	B200017-2-18S	16.0	18.6	SMH200-H18R	SMH200-H18S
20	B200017-2-20R	B200017-2-20S	18.0	20.6	SMH200-H20R	SMH200-H20S
22	B200017-2-22R	B200017-2-22S	20.0	22.6	SMH200-H22R	SMH200-H22S
24	B200017-2-24R	B200017-2-24S	22.0	24.6	SMH200-H24R	SMH200-H24S
26	B200017-2-26R	B200017-2-26S	24.0	26.6	SMH200-H26R	SMH200-H26S
28	B200017-2-28R	B200017-2-28S	26.0	28.6	SMH200-H28R	SMH200-H28S