

# B200024



### ► 主要技术特性 (Main Specifications)

- 适用导线规格 (Applicable wire) : AWG30#~24#
- 适用基板厚度 (Applicable PC board thickness) : —
- 温度范围 (Temperature range) : -25°C~+85°C
- 额定电压 (Voltage rating) : 250V AC, DC
- 额定电流 (Current rating) : 2A AC, DC
- 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- 耐压 (Withstanding voltage) : 800V AC/minute

### 材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
端子 TERMINAL	锡青铜 Phosphor bronze	0.3mm	镀锡 Tin-plated
端子护套 TERMINAL SHEATH	不锈钢 Stainless steel	0.15mm	N/A

### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

## HOUSING

B200024-2

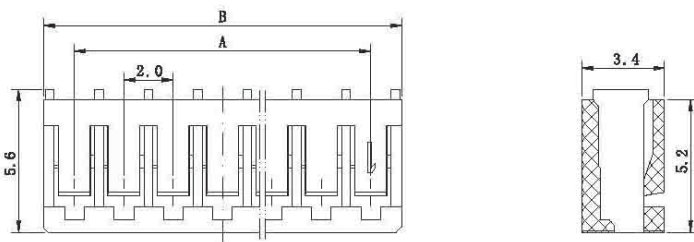

## HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B200024-2-02	2.0	4.5	YBH200-02
3	B200024-2-03	4.0	6.5	YBH200-03
4	B200024-2-04	6.0	8.5	YBH200-04
5	B200024-2-05	8.0	10.5	YBH200-05
6	B200024-2-06	10.0	12.5	YBH200-06
7	B200024-2-07	12.0	14.5	YBH200-07
8	B200024-2-08	14.0	16.5	YBH200-08
9	B200024-2-09	16.0	18.5	YBH200-09
10	B200024-2-10	18.0	20.5	YBH200-10
11	B200024-2-11	20.0	22.5	YBH200-11
15	B200024-2-15	28.0	30.5	YBH200-15